


TouchWo®

10.4" Touch Screen Monitor

Model : DM104F

Views & Dimensions

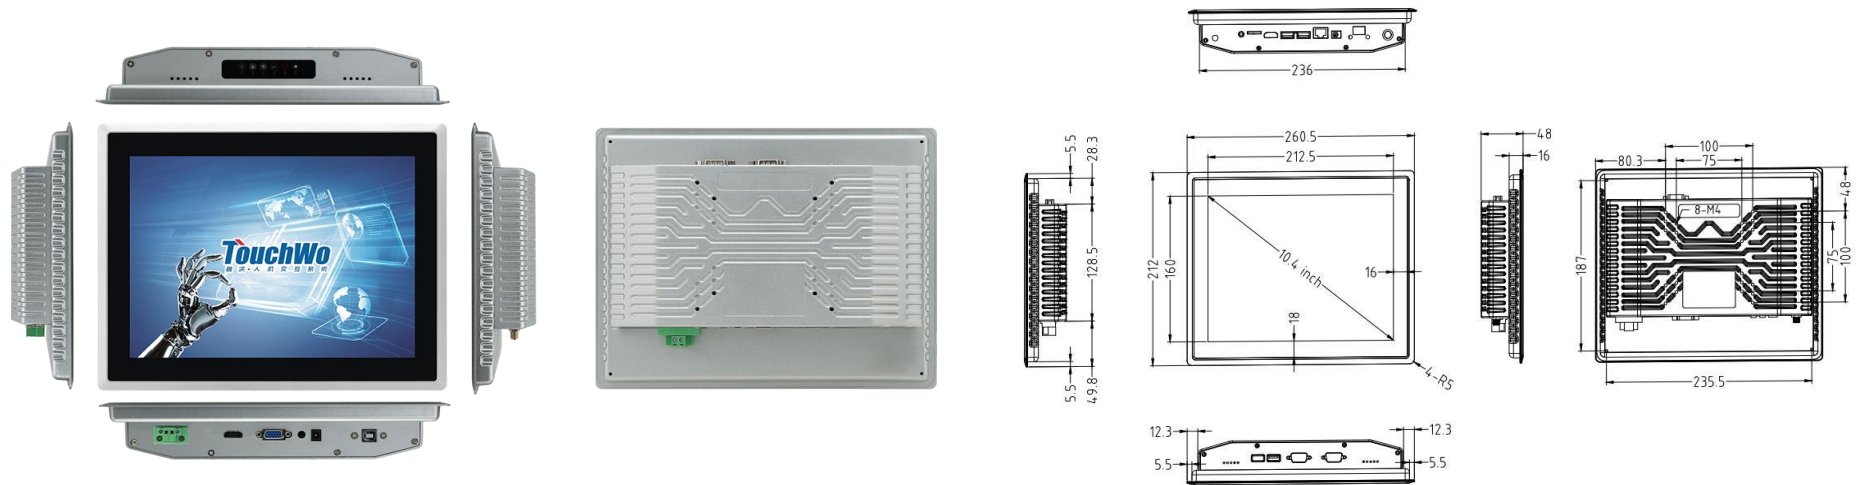

Features

- **24/7 Commercial Use**
 - Industrial-grade Power Supply
 - 30,000-hour extended life LCD display
- **Wall mounted/desktop stand/embedded etc**
- **Stylish Appearance**
 - Full aluminum alloy frame
 - Efficient heat dissipation
- **Surface IP65 waterproof**

CE FCC RoHS


Tech Specs

LCD Panel	Screen diagonal	10.4inch	Included in the Delivery	Touch technology	PCAP
	Physical resolution	1024*768		Response time	<5ms
	Aspect ratio	4:3		Touch points	10 points standard
	Display active screen size (mm)	212.5*160 mm		Touch effective recognition	>1.5mm
	Colours displayed	16.7M		Scanning Frequency	200Hz
	Brightness (cd/m2)	≥250cd/m2		Scanning accuracy	4096 * 4096
	Contrast	≥ 1000: 1		Working Current/Voltage	180Ma/DC+5V±5%
	Visual Angle H/V (°)	85/85/85/85(Typ.)(CR≥10)			
	Backlight	WLED		Surface Hardness	Mohs class 7 explosion-proof glass
	Refrash Rate	60 Hz			
Power supply parameters	Power Input	100-240V AC 50/60Hz	Included in the Delivery	Manual	* 1
	Power Output	DC 12V3A		Snap	* 4
	Standby power consumption	≤0.5W		Power Adapter&cable	* 1
	Overall power consumption	<20W		HDMI/USB Cable	* 1

Operation Environment	Operation Temperature	0~50℃	Machine(mm)	260.5(W)*212(H)*47.8(T)
	Operation Humidity	10% - 80%	Embedded opening size(mm)	250.5(W)*202(H)
	Storage Temperature	-5℃-60℃	Net weight	1.65 KG
	Storage Humidity	10% - 85%	Gross weight	3.15KG
	EMC	CE/FCC Class B	Mounting bracket	Embedded/Wall mounted


Dimension

External Connectors

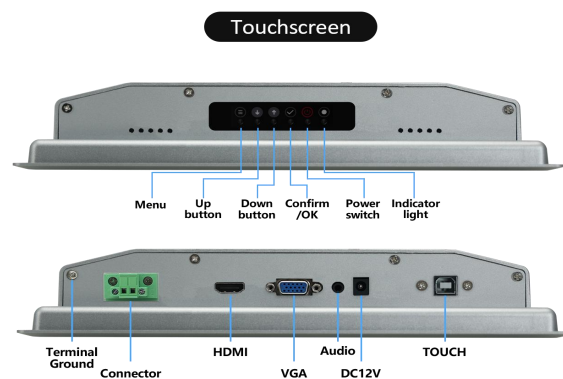

DC2.1 In	2.1mm DC12V*1/2P Phoenix Terminal*1	Audio	* 1	VGA	*1	Earphone Output	*1
USB-B	* 1	HDMI input	* 1	DVI input	*1		

Installation Diagram

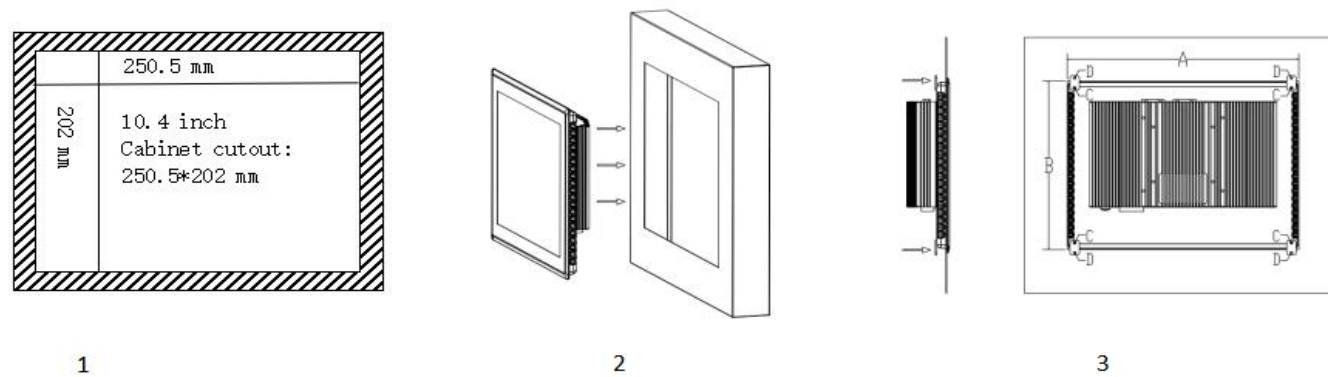

Step 1: Open the holes according to the size as 1

Step 2: Push machine from the outside to the inside embedded, as shown in 2

Step 3: Fix the card in the back shell C screw holes, use a screwdriver to tighten the screws at D, the installation is complete, as shown in 3

Use Case

