

TouchWo[®]

21.5" Touch Screen Monitor

Model : DM215F

Views



Features

- **24/7 Industrial Use**

Industrial-grade Power Supply

Screen sizes ranging from 8" to 23.8"

- **Panel mounted/VESA mounted**

- **Industrial Grade**

Full enclosed aluminum alloy

High ESD protection level

- **IP65 protection level**


CE FC RoHS

Tech Specs

		LCD Panel (Standard)	LCD Panel (Industrial)		
LCD Panel	Screen diagonal	21.5inch		Touch technology	PCAP
	Physical resolution	1920*1080		Response time	<5ms
	Aspect ratio	16:09		Touch points	10 points standard
	Display active screen size (mm)	477.6*269.1 mm		Touch effective recognition	>1.5mm
	Colours displayed	60 Hz		Scanning Frequency	200Hz
	Brightness (cd/m2)	≥250cd/m2	≥250cd/m2	Scanning accuracy	4096 * 4096
	Contrast	≥ 3000: 1	≥3000: 1	Working Current/Voltage	180Ma/DC+5V±5%
	Visual Angle H/V (°)	16.7M	16.7M		
	Backlight Lifetime (hours)	LED 30000	LED 30000	Surface Hardness	Mohs class 7 explosion-proof glass
	Refrash Rate	89/89/89/89 (Typ.)(CR≥10)			
Power supply parameters	Power Input	100-240V AC 50/60Hz		Manual	* 1
	Power Output	DC 12V		Panel mount Sets	* 1
	Standby power consumption	≤0.5W		Power Adapter&cable	* 1
	Overall power consumption	<20W			

Operation Environment	Operation Temperature	0~50℃ -20~85℃	Dimension	Machine(mm)	534(W)*327(H)*50.5(T)
	Operation Humidity	10% - 80%		Embedded opening size(mm)	525(W)*318(H)
	Storage Temperature	-5℃-60℃		Net weight	5.54 KG
	Storage Humidity	10% - 85%		Gross weight	6.74KG
	EMC	CE/FCC Class B		Package Size	585*420*149 mm

External Connectors

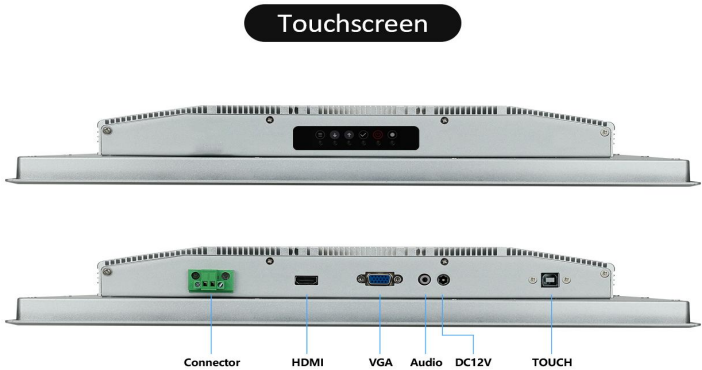

DC2.1 In

2.1mm DC12V*1/2P Phoenix Terminal*1

USB for touch

* 1

Audio

* 1


VGA


*1

HDMI input


* 1

Dimension

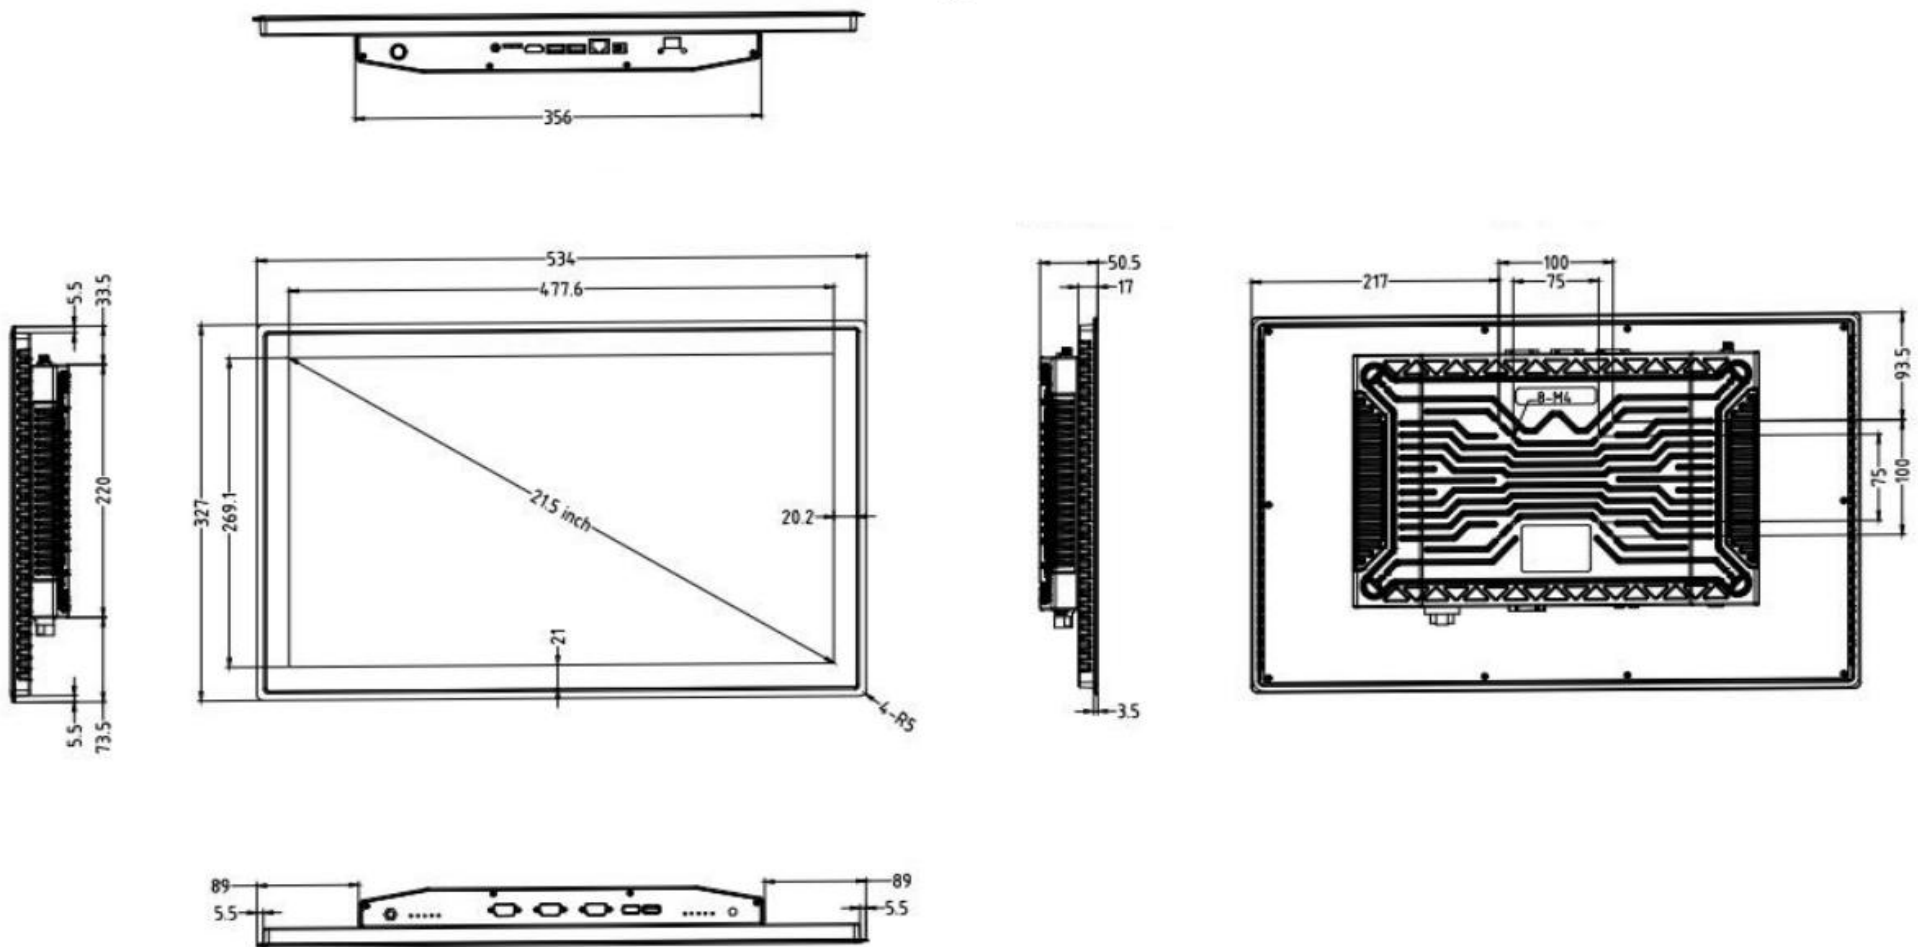


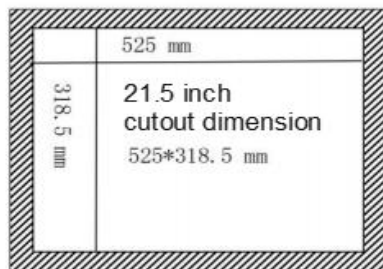

Step1



step 2

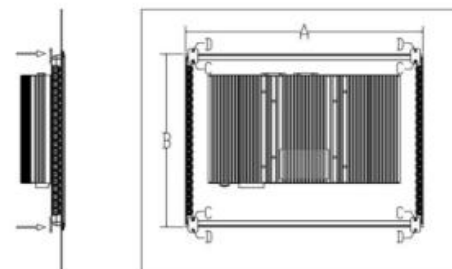

step 3

Use Case

